

A-3290 Wi-Fi Industrial Remote Controller Quick Start

The A-3290 Wi-Fi Industrial Remote Controller had a two-way communication to communicate with the Modbus TCP/IP.

Suitable For the A-12 Series Wi-Fi I/O Modules.




Before the regular use, must finish the related setup process. And prepare below items to finish the setup.

1. Download and install the A-3290 connect cable **CAB-89** driver from below web link.

http://www.szatc.com/uploads/download_file/CAB89.rar

2. Prepare A-3290 and CAB-89 cable.

3. Open the A-3290 rear cover and use the CAB-89 to link the A-3290 and the PC. (Remove the battery)

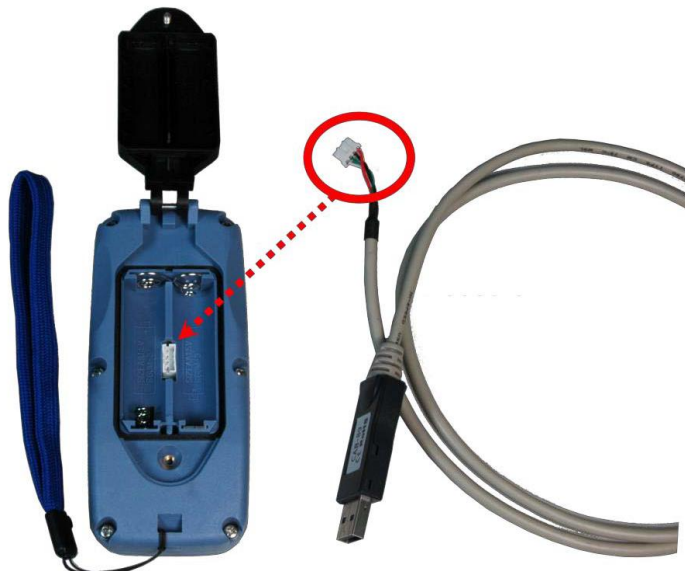

http://www.szatc.com/uploads/download_file/utility_setup.zip

You can set the Wi-Fi parameters in the following figure.

LED Indication

Green & Red spark: When power on, the A-3290 need to press the password. When finish, press the START.

Green: Success to connect.

Red: disconnect.

SSID

Password

Tx Power

MAC Address

Device ID

LED

On Time (ms)

Off Time (ms)

Sleep Mode

WiFi Key Password

IP Address

Port

Modbus Start Address

Contact us

Shenzhen ATC Technology Co., Ltd

Room 803, Block B, Building 4, Tian'an Cyber Park, Longgang District, Shenzhen,China,518172

Tel: +86-755 - 8345 2531 / 8345 3318

Fax: +86-755-2899 8985

Website:www.szatc.com

E-mail:sales@szatc.com